

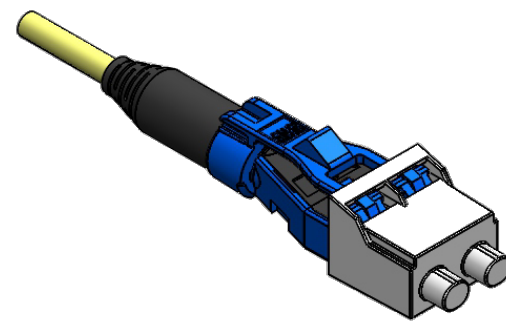


# Technical Datasheet

## EasyLan® FO Patch Cord LC-D Uniboot

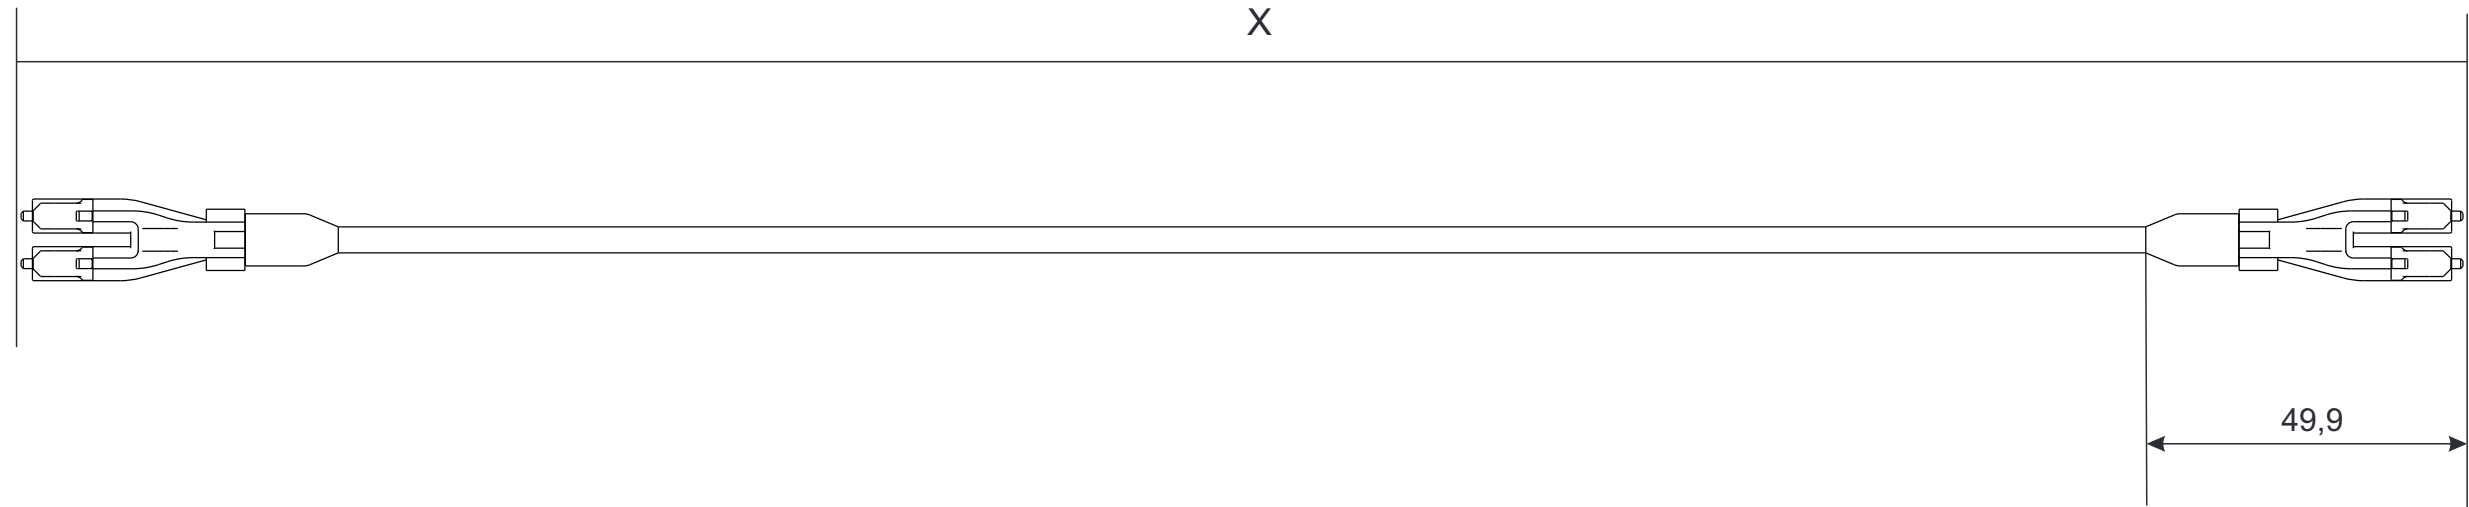

incl. PushPull Tab (accessory) with length 51mm

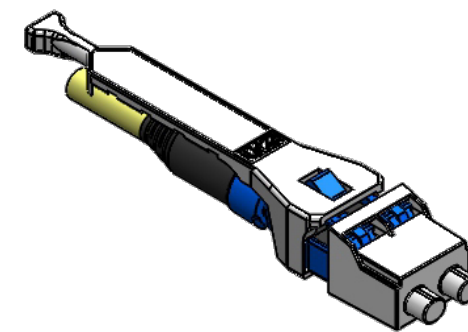

### Length tolerance

X < 5m	- 0,00 m + 0,07 m
X > 5m	- 1% + 1%

	Singlemode	Multimode
<b>Insertion Loss</b>	0,20dB typical	0,20dB typical
<b>Return Loss</b>	≥ 55 dB typical for singlemode PC	
<b>Durability</b>	IL < 0,2dB typical change 500 matings	
<b>Operating Temperature</b>	-40°C to +70°C	
<b>Ferrule Hole Size</b>	125.5µm +1/-0 Concentricity: ≤ 1µm	127µm +2/-1 Concentricity: ≤ 5µm

drawn	12.05.2021	LP
appr.	12.05.2021	GF
Titel:		
EasyLan® FO Patch Cord LC-D Uniboot		
Drawing Number		
ZN-FO210184		
a	Neuerstellung	12.05.2021
Index	Revision code	Date
		Name





Dimensions: mm

Original: DIN A3

Sheet 1 of 2

# Technical Data

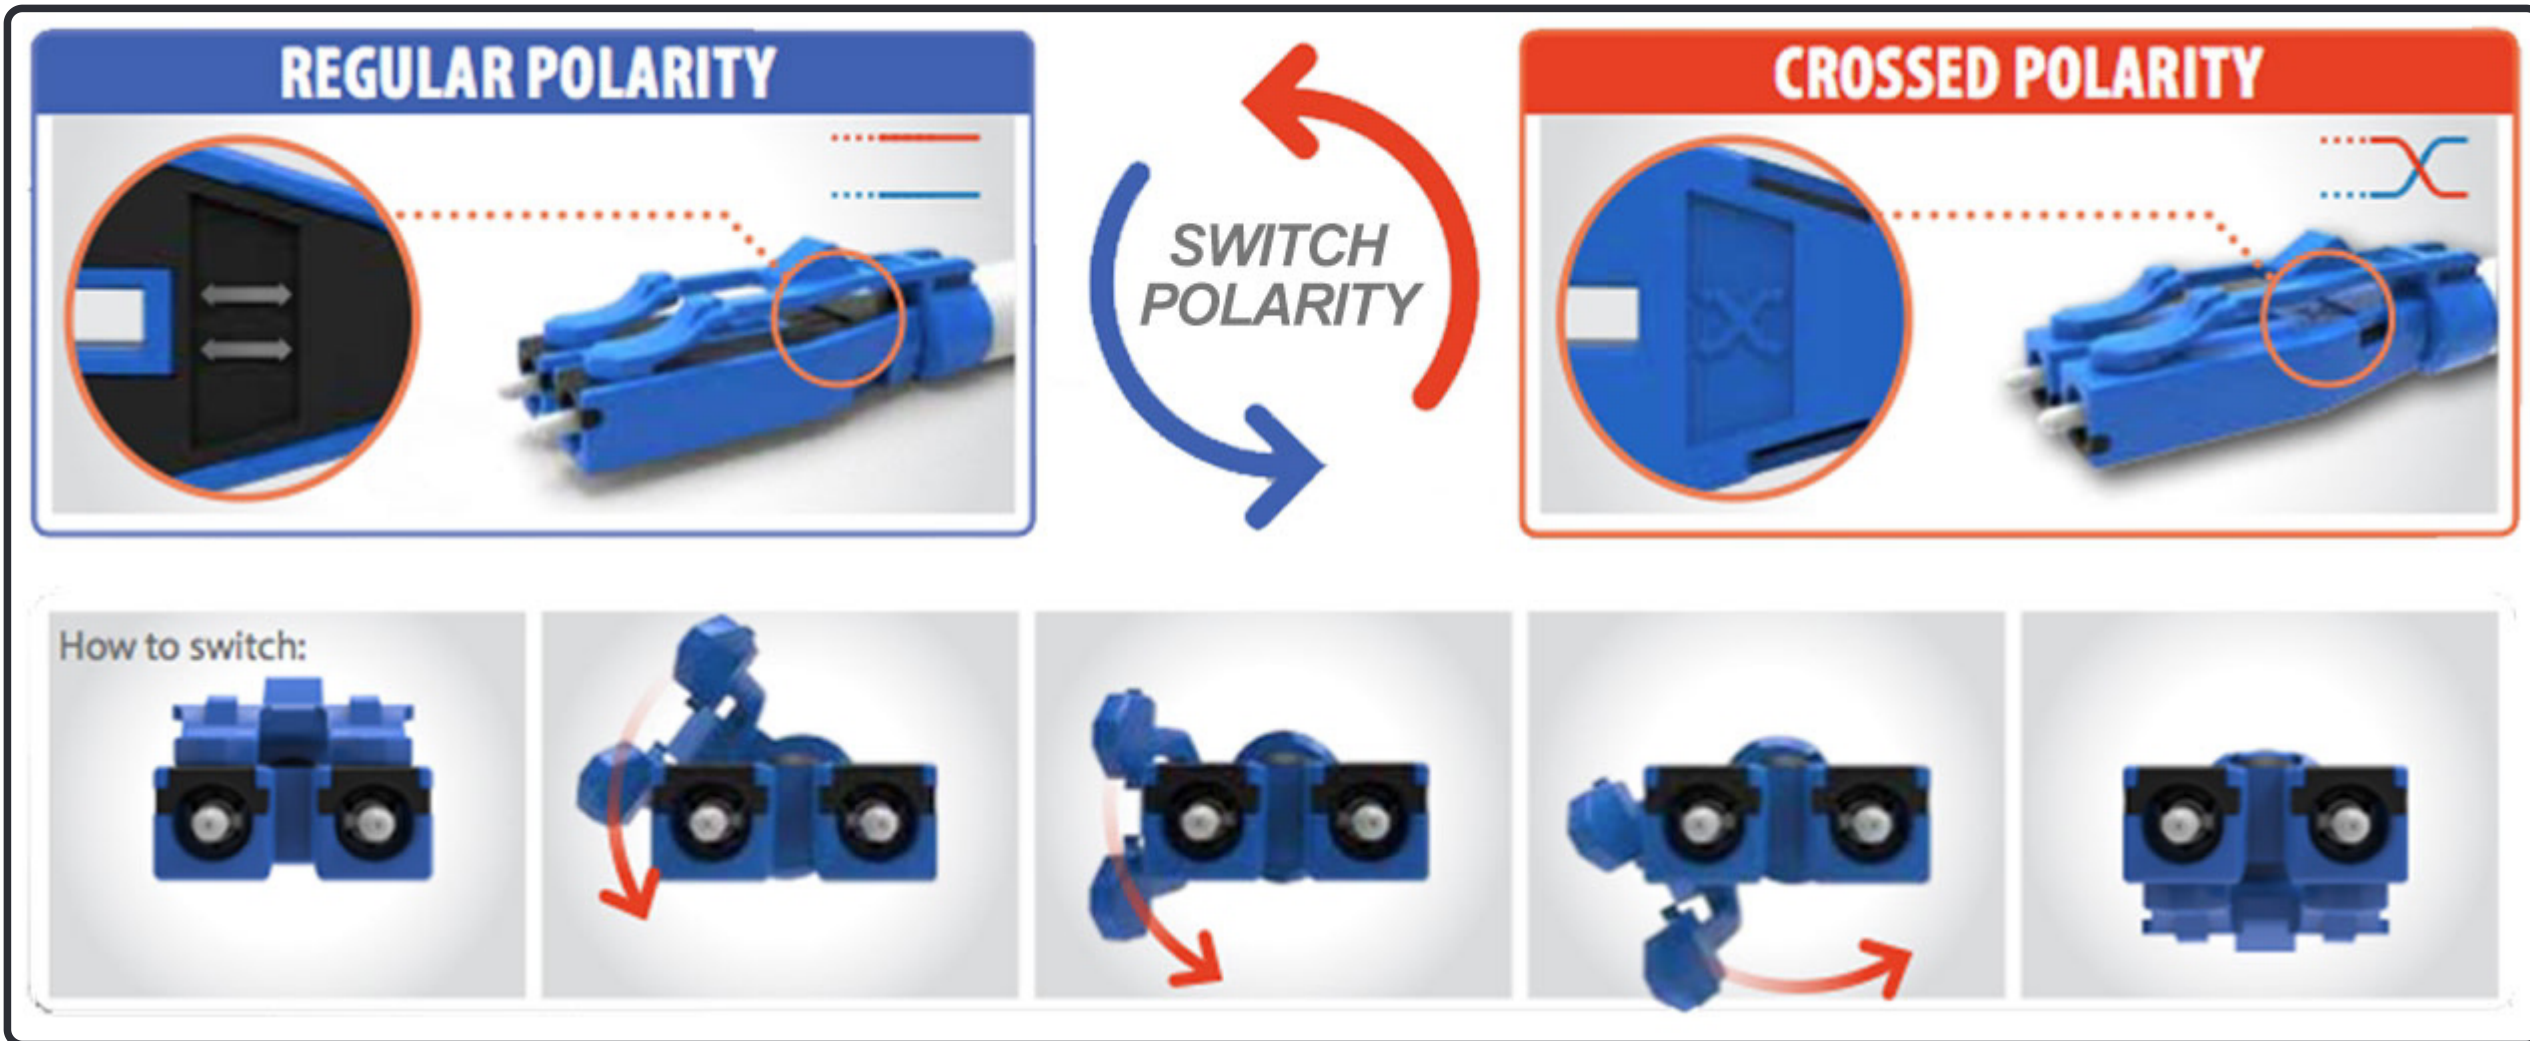

				drawn	12.05.2021	LP	 <b>EasyLan®</b> ...for a better connectivity
				appr.	12.05.2021	GF	
Titel: <b>EasyLan® FO Patch Cord          LC-D Uniboot</b>							Dimensions: mm
Drawing Number <b>ZN-FO210184</b>							Original: DIN A3
							Sheet 2 of 2

All rights reserved ZVK GmbH D-94244 Teisnach Technologiestampus 2 Germany Phone: +49 9923 804379-0 Fax: +49 9923 804379-50 www.zvk-gmbh.de all data without guarantee