


Patch cable VoIP RJ45 Shielded

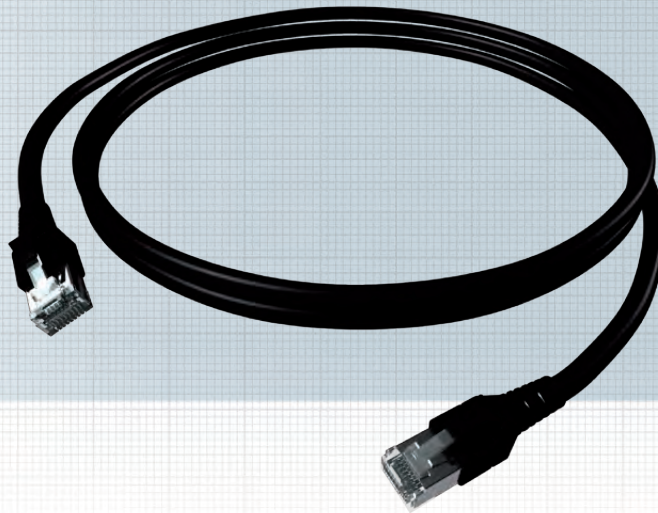

Connection cable RJ45/RJ45 shielded with a 1:1 assignment. A saCon plug with dual-boot overmolding is used on one end. On the second end, a highly compact RJ45 connector is used. This cable was specially developed for the VoIP application since e.g. very little space is available for the plug in VoIP phones. The cable used offers a maximum data security thanks to its braided shield with pair shielding as well as the 360° shielded RJ45 connectors.

Standards:

IEEE 802.3; 10BaseT; 100BaseT; 1000BaseT;
IEEE 802.5 16MB; ISDN; ATM; Telefon

Properties:

Sheaths / Color	FRNC/LSOH (Kink protection Tera™ black / RJ45-color) / gray
EMC	Combination shield (PiMF + braid) / plug to EN 60603-7 with 360° shielding
Chemical properties	Free of hazardous substances pursuant to RoHS 2002/95/EC
Packaging unit	up to 3m in length: 10 units in polybag; 3.01 - 5m in length: 5 units in polybag; over 5m: packed individually
Length key	last four digits in ordering code = length of cord in dm

Description	Ordering code
VoIP - Patch Cord Cat. 6 _A (ISO/IEC), shielded, black, 1 m	CPVoIPISCSOS0010
VoIP - Patch Cord Cat. 6 _A (ISO/IEC), shielded, black, 2 m	CPVoIPISCSOS0020
VoIP - Patch Cord Cat. 6 _A (ISO/IEC), shielded, black, 3 m	CPVoIPISCSOS0030
VoIP - Patch Cord Cat. 6 _A (ISO/IEC), shielded, black, 5 m	CPVoIPISCSOS0050
VoIP - Patch Cord Cat. 6 _A (ISO/IEC), shielded, black, 7.5 m	CPVoIPISCSOS0075
VoIP - Patch Cord Cat. 6 _A (ISO/IEC), shielded, black, 10 m	CPVoIPISCSOS0100