
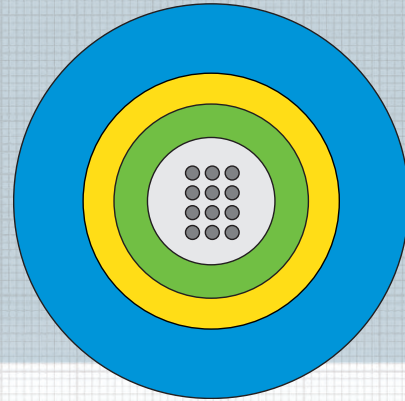


Universal Central Tube Cable

2 - 24 fibres

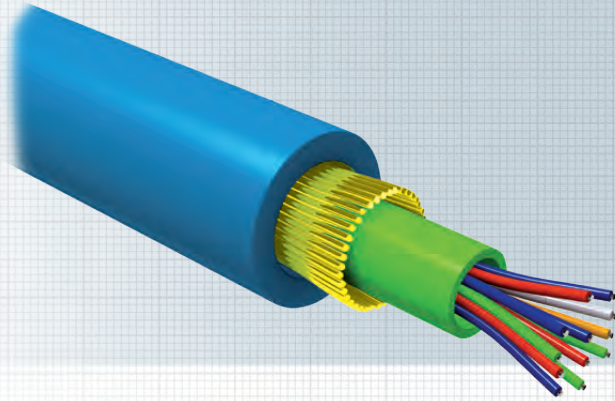

This cable can be used for LAN and WAN backbones, tele-com access lines, fibre to business and fibre to the building drop connections as well as fibre to the home drop and access connections. With its FireBur® LSHF sheathing this cable is ideal for mixed indoor and outdoor installation. This cable features a high tensile strength and a degree of rodent protection, effective in many cases. It is equally suited for installation in ducts and on trays. The cable may be used for direct burial with proper sand back filling.

Standards:

ISO 11801 2nd edition, EN 50173-1:2002, IEC 60794-1

Flame resistance:

LSHF (LSOH): IEC 60332-1-2; IEC 60754-1; IEC 60754-2; IEC 61034-2; Class E_{ca}

Construction:

Loose tube	Ø 2.8 mm gel-filled loose tube with 2-16 fibres		Ø 3.5 mm gel-filled loose tube with 24 fibres	
Fibre colour code	1	Red	13	Yellow w/mark per 70 mm
	2	Green	14	White w/mark per 70 mm
	3	Blue	15	Grey w/mark per 70 mm
	4	Yellow	16	Turquoise w/mark per 70 mm
	5	White	17	Orange w/mark per 70 mm
	6	Grey	18	Pink w/mark per 70 mm
	7	Brown	19	Yellow w/mark every 35 mm
	8	Violet	20	White w/mark every 35 mm
	9	Turquoise	21	Grey w/mark every 35 mm
	10	Black	22	Turquoise w/mark every 35 mm
	11	Orange	23	Orange w/mark every 35 mm
	12	Pink	24	Pink w/mark every 35 mm
Strength member	Water-blocked E-Glass fibre elements			
Sheath	1.5mm blue FireBur® sheath, UV stabilized, IEC 50290-2-27			