


# OBO/Ackermann Inserts for Floor Tank Systems GB2, GB3

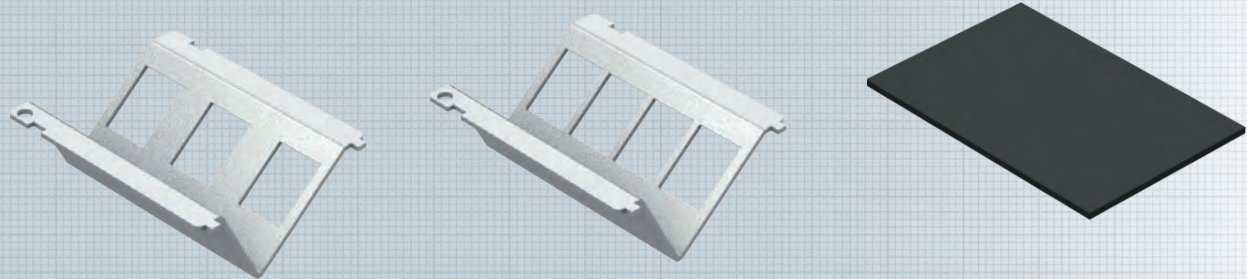

## Installation plates for 3 or 4 Keystone modules

For grounding purposes, the inserts for modules are not powder-coated or hot-dip galvanized. The installation plates are fastened to the support plate with two screws. Unused fields in the support plate can be covered with dummy plates.

## Properties:

Dimension	Per specification of OBO/Ackermann underfloor systems
Material	steel plate, hot-dipped galvanized
Color inserts	Metal, hot-dipped galvanized, black, RAL 9005
Color	black, RAL 9005
Material thickness	1.5 mm

## Installation examples:



Description	Ordering Code
OBO / Ackermann Carrier Plate 4x Keystone for Underfloor System, Nickel-plated	ABG00014
OBO / Ackermann Carrier Plate 3x Keystone for Underfloor System, Nickel-plated	ABG00016
OBO / Ackermann Carrier Plate 1x H.D.S. for Underfloor System, Nickel-plated	ABG00015
OBO / Ackermann Dummy Plate for Underfloor System, RAL 9005	ABG00013