


Panel 19" 0.5U for 24 Keystone modules

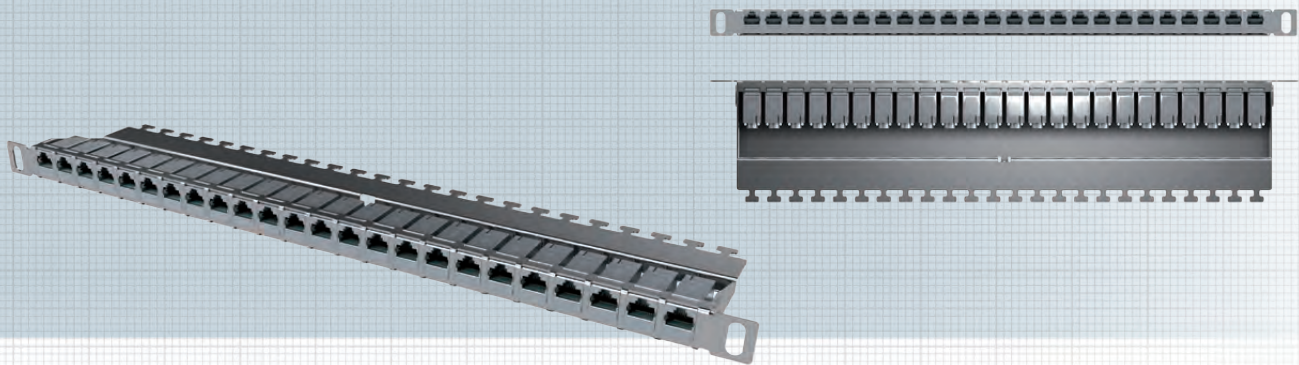


The fixLink® distribution panel 19" 0.5U can be loaded with up to 24 fixLink® RJ45 Keystone modules. The modules are flush with the front panel.

Mounting material and Keystone modules are not included!

Standards:	IEC 60 603-7-1
-------------------	----------------

Properties:	
Installation dimension	19" 0.5U depth 155 mm
Front side	standard cut-out 24 modules
Back side	cable clamps
Material housing	stainless steel
Cable fastening	via velcro cable ties
Materials	According to RoHS 2002/95/EG
Connection class	IP20
Temperature range	-40° C to +70° C
Application	Installation in distribution rack
Packaging unit	1 piece per box

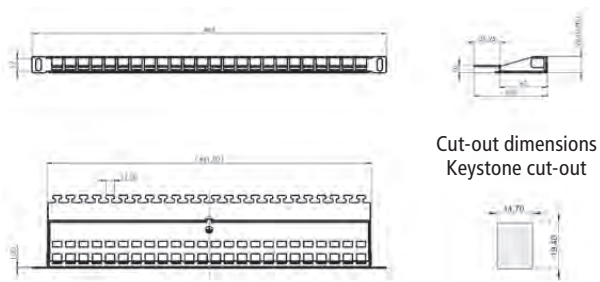

Description	Ordering Code
preLink® / fixLink® Panel 19" 0,5U 24x Keystone, Stainless Steel	CKVPL5F0EE
Labeling area for für 19" Panel, Stainless Steel	CVZB5FEE

fixLink®-System
Cu