


OBO/Ackermann Inserts for Floor Tank Systems GB2, GB3

IN STOCK

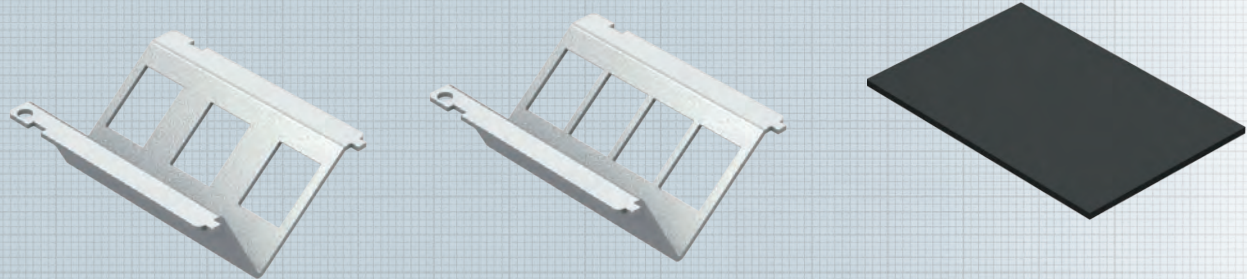

Installation plates for 3 or 4 Keystone modules

For grounding purposes, the inserts for modules are not powder-coated or hot-dip galvanized. The installation plates are fastened to the support plate with two screws. Unused fields in the support plate can be covered with dummy plates.

Properties:

Dimension	Per specification of OBO/Ackermann underfloor systems
Material	steel plate, hot-dipped galvanized
Color inserts	Metal, hot-dipped galvanized, black, RAL 9005
Color	black, RAL 9005
Material thickness	1.5 mm

Installation examples:



Description	Ordering Code
Carrier plate 4x Keystone Module nickel-plated unpolished	ABG00014
Carrier plate 3x Keystone Module nickel-plated unpolished	ABG00016
Carrier plate 1x H.D.S. nickel-plated unpolished	ABG00015
Dummy plate black RAL 9005	ABG00013