


preLink® DC Panel 19" 1U, Cat. 6_A ISO/IEC Cat. 6A EIA/ITA, Class EA, with L.E.O. Function

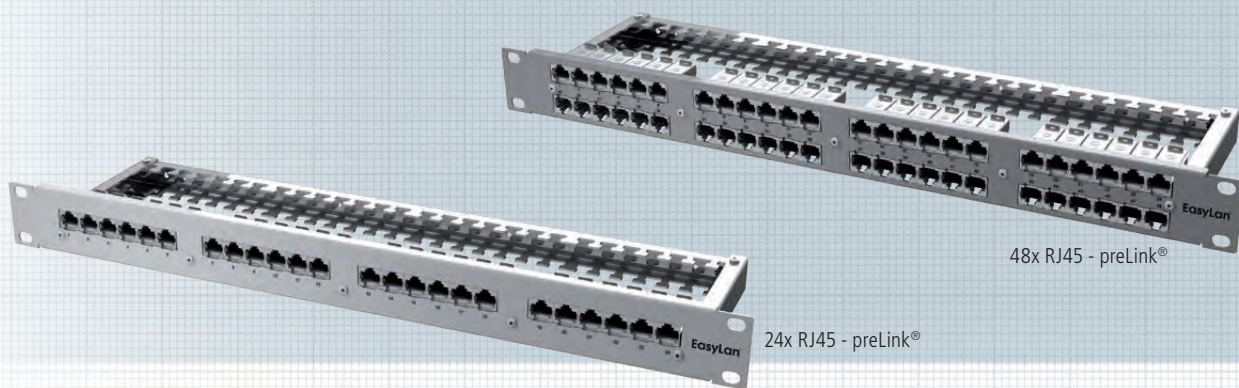

For the preLink® Data Center patch panel Cat. 6A EIA/ITA the data center modules come pre-mounted on a rail and need only be finalized with the relevant cable terminal block. Here, we particularly recommend the pre-assembled data center solutions, which may be ordered as single or multiple cable.

The "Light-Emitting-Outlet" (L.E.O.) allows you to easily identify matching cable ends using a detector. The con-

nections on both sides can be made to emit light even in the case of patched data links. This function works with all common, shielded data cables.

This works with all standard shielded data cables. Due to their slim design, the die-cast zinc socket modules are especially suitable for densely packed data center panels with up to 48 ports in 1U.

Packaging unit: 1 pc. per box

Description	Ordering Code
preLink® DC-Panel 19" 1U 24x RJ45 Cat.6 _A (ISO/IEC), with Cable Termination AWG 24-22	CKRASP111E
preLink® DC-Panel 19" 1U 24x RJ45 Cat.6 _A (ISO/IEC), with Cable Termination AWG 27-26	CKRASP161E
preLink® DC-Panel 19" 1U 24x RJ45 Cat.6 _A (ISO/IEC), without Cable Termination	CKRARP101E
preLink® DC-Panel 19" 1U 48x RJ45 Cat.6 _A (ISO/IEC), with Cable Termination AWG 24-22	CKRASP611E
preLink® DC-Panel 19" 1U 48x RJ45 Cat.6 _A (ISO/IEC), with Cable Termination AWG 27-26	CKRASP661E
preLink® DC-Panel 19" 1U 48x RJ45 Cat.6 _A (ISO/IEC), without Cable Termination	CKRARP601E
preLink® DC-Panel L.E.O. 19" 1U 24x RJ45 Cat.6A (EIA/TIA), with Cable Termination AWG 24-22	CKRESL111E
preLink® DC-Panel L.E.O. 19" 1U 24x RJ45 Cat.6A (EIA/TIA), with Cable Termination AWG 27-26	CKRESL161E
preLink® DC-Panel L.E.O. 19" 1U 24x RJ45 Cat.6A (EIA/TIA), without Cable Termination	CKRERL101E
preLink® DC-Panel L.E.O. 19" 1U 48x RJ45 Cat.6A (EIA/TIA), with Cable Termination AWG 24-22	CKRESL611E
preLink® DC-Panel L.E.O. 19" 1U 48x RJ45 Cat.6A (EIA/TIA), with Cable Termination AWG 27-26	CKRESL661E
preLink® DC-Panel L.E.O. 19" 1U 48x RJ45 Cat.6A (EIA/TIA), without Cable Termination	CKRERL601E
preLink® L.E.O. Detector	CKZWD001