


OBO / Ackermann Floor Tank Carrier Basic GB2, GB3

IN STOCK

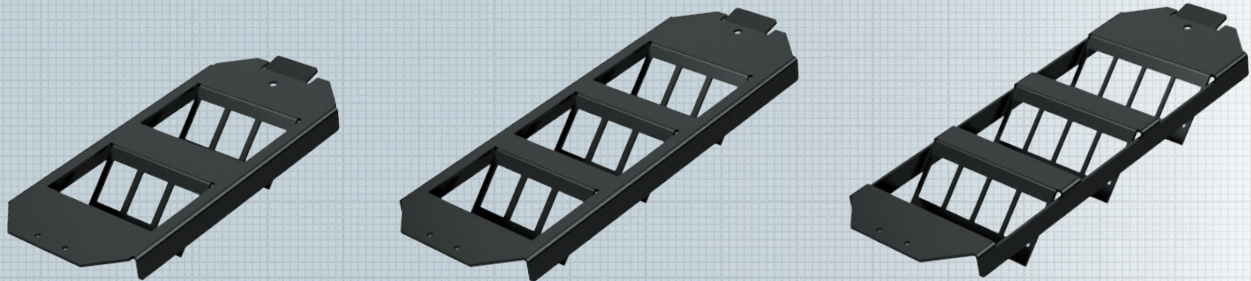


The Keystone floor tank carrier replaces the device carrier and therefore offers the largest possible space in the cable feed. The angled feed and lead-away permits a safe cable routing even in case of very low false floors. The installation plates will be fastened at the carrier plate using two screws, Keystone cut outs of the floor tank carrier that are not used can be covered dust proof using blind plates.


Using an adapter, the floor tank carrier can also be used for Electraplan equipment carriers.

Characteristics:


Dimensions	- According to the specifications of Ackermann underfloor systems - possible through adapter installation in Electraplan
Material	Steel sheet, hot-dip galvanized
Color	black RAL 9005
Material thickness	1.5 mm
Equipping	- 2x3 Keystone modules in GB2 carrier - 3x3 Keystone modules in GB2 carrier - 3x4 Keystone modules in GB2 carrier GB2 and GB3
Design	GB2 and GB3
Packing unit	one piece each

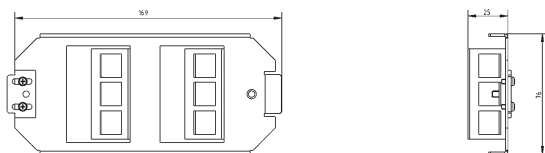

GB2 / 2x3 keystones

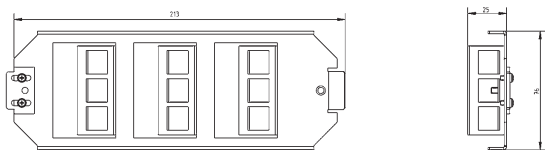

GB3 / 3x3 keystones

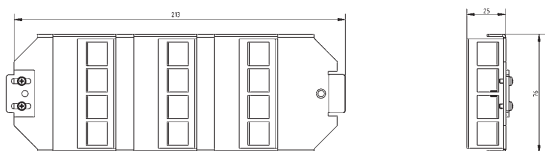

GB3 / 3x4 keystones

Description	Ordering Code
OBO / Ackermann floor tank carrier basic GB2 2x3 Keystone	ABGECO23
OBO / Ackermann floor tank carrier basic GB3 3x3 Keystone	ABGECO33
OBO / Ackermann floor tank carrier basic GB3 3x4 Keystone	ABGECO34